



**ENERG**  
енергия · ενεργεια




**NIBE**

NIBE F2040-12



55 °C

35 °C



**A++**

**A++**



dB



**57** dB

■ 13  
■ **10**  
■ 12  
kW

■ 12  
■ **12**  
■ 12  
kW



2019



811/2013




**ENERG** Y IJA  
енергия · ενεργεια IE IA





NIBE F2040-12 + VVM S320

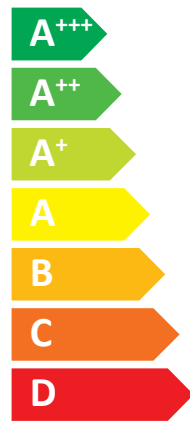

A++

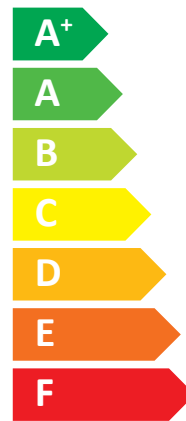

A

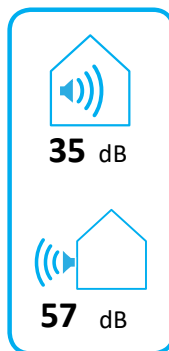

2019

811/2013



# ENERG

енергия · ενέργεια

Y






IJA


IE


IA


**NIBE**


## NIBE F2040-12 + VVM S320













+ 

+ 

+ 


+ 

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F2040-12+ VVM S320</b>		
Temperature application	<b>35</b>	<b>55</b>	°C
Declared load profile for water heating	<b>XL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	57		dB

### Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

<b>Model(s):</b>				<b>NIBE F2040-12+ VVM S320</b>								
Type of heat source/sink:				Air-to-water								
Low-temperature heat pump:				No								
Equipped with supplementary heater:				Yes								
Heat pump combination heater:				Yes								
Climate condition:				Average								
Temperature application:				Medium temperature (55 °C)								
Applied standards: EN14825 and EN16147												
<b>Rated heat output</b>				Prated	10,0	kW		<b>Seasonal space heating energy efficiency</b>				
								$\eta_s$	132	%		
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>				
Tj = -7 °C	Pdh	8,9	kW		Tj = -7 °C	COPd	1,99	-				
Tj = +2 °C	Pdh	5,5	kW		Tj = +2 °C	COPd	3,22	-				
Tj = +7 °C	Pdh	3,5	kW		Tj = +7 °C	COPd	4,61	-				
Tj = +12 °C	Pdh	5,0	kW		Tj = +12 °C	COPd	6,25	-				
Tj = biv	Pdh	9,2	kW		Tj = biv	COPd	1,90	-				
Tj = TOL	Pdh	8,1	kW		Tj = TOL	COPd	1,92	-				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		-				
Bivalent temperature				T <sub>biv</sub>	-7,9	°C		Operation limit temperature				
Cycling interval capacity for heating				P <sub>cyc</sub>		kW		Cycling interval efficiency				
Degradation co-efficient				Cdh	0,98	-		Heating water operating limit				
								TOL	-10	°C		
								COP <sub>cyc</sub>		-		
								WTOL	58	°C		
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>				
Off mode	P <sub>OFF</sub>	0,002	kW		Rated heat output				P <sub>sup</sub>	1,9	kW	
Thermostat-off mode	P <sub>TO</sub>	0,014	kW									
Standby mode	P <sub>SB</sub>	0,015	kW		Type of energy input				Electric			
Crankcase heater mode	P <sub>CK</sub>	0,035	kW									
<i>Other items</i>												
Capacity control	variable			Rated air flow rate, outdoors					4380	m <sup>3</sup> /h		
Sound power level, indoors/outdoors	L <sub>WA</sub>	35/57	dB		Rated water flow rate, indoor heat exchanger					0,86	m <sup>3</sup> /h	
Annual energy consumption	Q <sub>HE</sub>	6136	kWh		Rated brine or water flow rate, outdoor heat exchanger						m <sup>3</sup> /h	
<i>For heat pump combination heater:</i>												
<b>Declared load profile</b>				<b>XL</b>				<b>Water heating energy efficiency</b>				
								$\eta_{wh}$				
								98				
								%				
Daily electricity consumption	Q <sub>elec</sub>	7,75	kWh		Daily fuel consumption				Q <sub>fuel</sub>		kWh	
Annual electricity consumption	AEC	1702	kWh		Annual fuel consumption				AFC		GJ	
<b>Approved by:</b>												
<b>Contact details</b>				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								